

Amazon Drop Test Evaluation for Flexible Packages

Date:

Vendor/Seller Name:

ASIN:

Item:

Package Weight (lbs) *cannot exceed 7 lbs:*

Certification (choose only one):

FFP*

SIOC

Package Dimension (L x W x H inches):

**FFP requirements: 100% curbside recyclable packaging, Easy-To-Open, all contents removable within 120 seconds*

Sealing Method (select one):

Heat Seal

Adhesive

Tape

Resealable

Tamper Evident Seal *(required if resealable)*

ALL REQUIREMENTS BELOW MUST BE MET

Slack is less than 2 inches

Exempt from <2inch slack *(rigid and padded mailers)*

No protrusions

Hazard Drop Box* used

**Hazard Drop Box must be 9 x 6 x 3 inches and 3 lbs (or equivalent)*

Material Thickness ≥ 2 mils LDPE or minimum tear strength of ≥ 130 gram

Seal strength of ≥ 5.7 lb/in (1 N/mm) *(Adhesive Sealing Only)*

No holes larger than 0.25" (6.4mm)


No cosmetic or functional damage to product after testing

TEST PICTURES

Pre-test 1-2-5	Pre-test 3-4-6	Post-test - BOM

Post-test - Photo of item	Post-test - Contents marked as Recyclable	Photo of Hazard Drop Box used

Drop Number	Height	Orientation
1	18 in	Edge 3-4
2	18 in	Edge 3-6
3	18 in	Edge 4-6
4	18 in	Corner 3-4-6
5	18 in	Corner 2-3-5
6	18 in	Edge 2-3
7	18 in	Edge 1-2
8	36 in	Face 3
9	18 in	Face 3
10	18 in	Edge 3-4
11	18 in	Edge 3-6
12	18 in	Edge 1-5
13	18 in	Corner 3-4-6
14	18 in	Corner 1-2-6
15	18 in	Corner 1-4-5
16	36 in	Face 6
17	18 in	Face 3

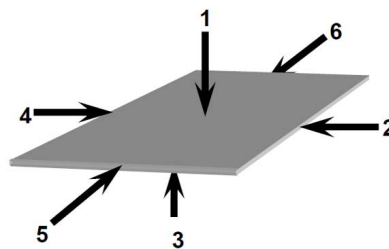

A test from an ISTA certified lab is required if it is categorized as any of the following:

- Fragile
- TV/Monitor
- Contains liquid

Hazard Box Test: Drop the Hazard box from a height of 36 inches, and orient it such that the corner impacts the test sample's bag. Repeat the drop twice more. Total number of drops is three.

For more information please visit:
<https://www.aboutamazon.com/packaging>